


Data sheet

chainflex® CF895



Motor cable (Class 3.1.3.1) ● For flexing applications ● iguPUR outer jacket ● Oil-resistant
● Flame-retardant

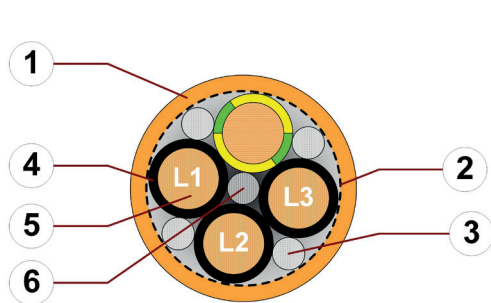

1. Outer jacket: Pressure extruded iguPUR mixture
2. Banding: Plastic foil
3. Filling: Plastic yarns
4. Core insulation: Mechanically high-quality, especially low-capacitance TPE mixture
5. Conductor: Stranded conductor consisting of bare copper wires
6. Strain relief: Plastic centre element



Example image

For detailed overview please see design table

Cable structure



Conductor

Conductor consisting of bare copper wires (according to DIN EN 60228).



Core insulation

Mechanically high-quality, especially low-capacitance TPE mixture.



Core structure

Cores wound with an optimised pitch length.



Core identification

Black cores with white numbers, one green-yellow core.
1. Core: U / L1 / C / L+
2. Core: V / L2
3. Core: W / L3 / D / L-



Outer jacket

Low-adhesion iguPUR mixture, adapted to suit the requirements in e-chains®.
Colour: Pastel orange (similar to RAL 2003)
Printing: black

„00000 m“* igus chainflex M CF895.--,--① ---② 600/1000V E310776

cRUus AWM Style 20940 AWM I/II A/B 80°C 1000V FT1 CE

RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.

① / ② Cable identification according to Part No. (see technical table).

Example: ... chainflex ... CF895.15.04 ... 4G1.5 ... 600/1000V ...

Example image

Data sheet

chainflex® CF895



Motor cable (Class 3.1.3.1) ● For flexing applications ● iguPUR outer jacket ● Oil-resistant
● Flame-retardant



Dynamic information

	Bend radius	e-chain® linear flexible fixed	minimum 15 x d minimum 12 x d minimum 8 x d
	Temperature	e-chain® linear flexible fixed	-20°C up to +80°C -40°C up to +80°C (following DIN EN 60811-504) -50°C up to +80°C (following DIN EN 50305)
	v max.	unsupported	3m/s
	a max.		20m/s ²
	Travel distance		Unsupported travels up to 10m, Class 1

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	1 million	3 million	5 million
Temperature, from/to [°C]	R min. [x d]	R min. [x d]	R min. [x d]
-20/-10	17.5	18.5	19.5
-10/+70	15	16	17
+70/+80	17.5	18.5	19.5

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

	Nominal voltage	600/1000V (following DIN VDE 0298-3) 1000V (following UL)
	Testing voltage	4000V (following DIN EN 50395)



Example image

Data sheet

chainflex® CF895



Motor cable (Class 3.1.3.1) ● For flexing applications ● iguPUR outer jacket ● Oil-resistant
● Flame-retardant



Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2 / Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	PTFE-free	The design of these products does not contain PTFE
	UL-verified	Certificate No. V293650: „igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	UL/CSA AWM	Details see table UL/CSA AWM
	NFPA	Following NFPA 79-2018, chapter 12.9
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
	CE	Following 2014/35/EU

Properties and approvals

UL/CSA AWM Details

Conductor nominal cross section [mm²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
1.5	4	10492	20940	1000	80
2.5	4	10492	20940	1000	80
4	4	10492	20940	1000	80
6	4	10492	20940	1000	80
10	4	10492	20940	1000	80
16	4	10492	20940	1000	80



Example image

Data sheet


chainflex® CF895



Motor cable (Class 3.1.3.1) ● For flexing applications ● iguPUR outer jacket ● Oil-resistant
● Flame-retardant

Typical lab test setup for this cable series

Test bend radius R	approx. 75 - 225 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s ²

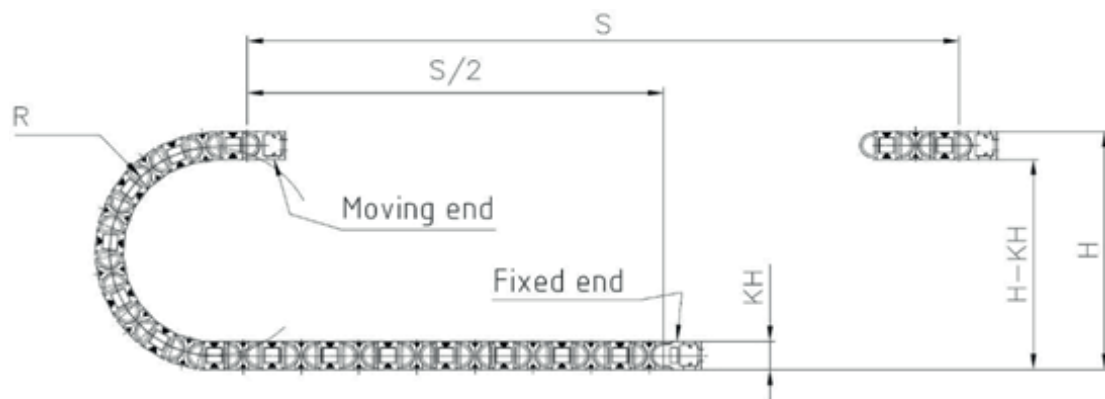

Typical application areas

- For flexing applications, Class 3
- Especially for unsupported travels, Class 1
- With influence of oil, Class 3
- No torsion, Class 1
- Indoor and outdoor applications without direct sun radiation
- Machining units/machine tools, low temperature applications

Example image



igus 4-year
chainflex cable
guarantee and
service life
calculator based
on 2 billion test
cycles per year



Data sheet

chainflex® CF895



Motor cable (Class 3.1.3.1) ● For flexing applications ● iguPUR outer jacket ● Oil-resistant
● Flame-retardant

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF895.15.04	4G1.5	8.0	67	101
CF895.25.04	4G2.5	10.0	110	153
CF895.40.04	4G4.0	11.5	175	239
CF895.60.04	4G6.0	13.5	262	353
CF895.100.04	4G10	17.0	436	543
CF895.160.04	4G16	20.0	653	824

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core

Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
1.5	13.3	19
2.5	7.98	27
4	4.95	37
6	3.3	48
10	1.91	69
16	1.21	92

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

igus® chainflex® CF895

Data sheet

chainflex® CF895



Motor cable (Class 3.1.3.1) ● For flexing applications ● iguPUR outer jacket ● Oil-resistant
● Flame-retardant

Design table

Part No.	Number of cores	Core design
CF895.XX.04	4	



Example image

